

External Control Inputs of Lorenz System

Kreangkri Ratchagit

Department of Mathematics, Faculty of Science,
Maejo University, Chiang Mai 50290, Thailand
e-mail: kreangkri@mju.ac.th

Abstract

In this paper, we study Lu's system, and we study the stability of equilibrium point of Lu's system. Then, we control the chaotic behavior of Lu's system to its equilibrium point using Adaptive Control with two controller's method.

Keywords: Lu's system; Adaptive Control with two controllers.

1 Introduction

Chaos in control systems and controlling chaos in dynamical systems have both attracted increasing attention in recent years. A chaotic system has complex dynamical behaviors that possess some special features, such as being extremely sensitive to tiny variations of initial conditions, having bounded trajectories in the phase space. Controlling chaos has focused on the nonlinear systems such as a Lu's system.

Lu's system was first introduced in [2] which is described by

$$\begin{aligned}\dot{x} &= a(y - x) \\ \dot{y} &= -xz + cy \\ \dot{z} &= xy - bz\end{aligned}\tag{1.1}$$

where x, y, z are state variables, a, b, c are positive constants.

The objective of this paper gives sufficient conditions of parameters that make equilibrium point of Adaptive Control with two controllers of the Lu's system to be asymptotically stable.

2 Main Results

In this section, the chaos of system (1.1) is controlled to one of three equilibrium point of system. Feedback control method is applied to achieve this goal.

Let us consider the Controlled system of the system (1.1) which has the form

$$\begin{aligned}\dot{x} &= a(y-x) + u_1 \\ \dot{y} &= -xz + cy + u_2 \\ \dot{z} &= xy - bz + u_3\end{aligned}\tag{2.1}$$

where x, y, z are state variables, a, b, c are positive constants and u_1, u_2, u_3 are external control inputs which will drag the chaotic trajectory (x_1, x_2, x_3) of the Lu's system to equilibrium point $E = (\bar{x}, \bar{y}, \bar{z})$ which is one of three steady states E_0, E_1, E_2 .

In this case the control law is

$$\begin{aligned}u_1 &= -g(x-\bar{x}) + \frac{3a}{4}\bar{x}(x-\bar{x})^2, u_2 = 0, \\ u_3 &= -(k(z-\bar{z}) + b(x-\bar{x})^2 + c\bar{x}(x-\bar{x}))\end{aligned}$$

Where k, g (estimates of k^*, g^* , respectively) are updated according to the following adaptive algorithm:

$$\begin{aligned}\dot{g} &= \mu(x-\bar{x})^2 \\ \dot{k} &= \rho(z-\bar{z})^2\end{aligned}$$

Where μ, ρ are adaptation gains. Then the controlled system (2.1) has following form:

$$\begin{aligned}\dot{x} &= a(y-x) - k_1(x-\bar{x}) - g(x-\bar{x}) + \frac{3a}{4}\bar{x}(x-\bar{x})^2 \\ \dot{y} &= -xz + cy - k_2(y-\bar{y}) \\ \dot{z} &= xy - bz - k_3(z-\bar{z}) - (k(z-\bar{z}) + b(x-\bar{x})^2 + c\bar{x}(x-\bar{x})) \\ \dot{g} &= \mu(x-\bar{x})^2 \\ \dot{k} &= \rho(z-\bar{z})^2\end{aligned}\tag{2.2}$$

Theorem 3.1 For $g = g^* > c, k = k^* > 0$, the equilibrium point $E = (\bar{x}, \bar{y}, \bar{z})$ of the system (2.2) is asymptotically stable.

Proof Let us consider the Lyapunov function

$$V(\xi_1, \xi_2, \xi_3) = \frac{1}{2} \left[\begin{array}{l} \frac{a}{c}(x - \bar{x})^2 + b(y - \bar{y})^2 \\ + \frac{c}{\mu a}(g - g^*)^2 + \frac{1}{\rho}(k - k^*)^2 \end{array} \right],$$

The time derivative of V in the neighborhood $E = (\bar{x}, \bar{y}, \bar{z})$ of the system (2.2) is

$$\begin{aligned} \dot{V} &= \frac{a}{c}(x - \bar{x})\dot{x} + b(y - \bar{y})\dot{y} + \frac{c}{\mu a}(g - g^*)\dot{g} \\ &+ \frac{1}{\rho}(k - k^*)\dot{k}. \end{aligned} \quad (2.3)$$

By substituting (2.2) in (2.3)

$$\begin{aligned} \dot{V} &= \frac{a}{c}(x - \bar{x}) \left[a(y - x) - k_1(x - \bar{x}) - g(x - \bar{x}) + \frac{3a}{4}\bar{x}(x - \bar{x})^2 \right] \\ &+ b(y - \bar{y})[-xz + cy - k_2(y - \bar{y})] + \frac{c}{\mu a}(g - g^*)(x - \bar{x})^2 \\ &+ \frac{1}{\rho}(k - k^*)(z - \bar{z})^2. \end{aligned}$$

Let $\eta_1 = (x - \bar{x}), \eta_2 = (y - \bar{y}), \eta_3 = (z - \bar{z})$. Since $(\bar{x}, \bar{y}, \bar{z})$ is an equilibrium point of the uncontrolled system (1.1), \dot{V} becomes

$$\begin{aligned} \dot{V} &= \frac{a}{c}\eta_1 \left[a((\eta_2 + \bar{y}) - (\eta_1 + \bar{x})) - k_1\eta_1 - g\eta_1 + \frac{3a}{4}\bar{x}\eta_1^2 \right] \\ &+ b\eta_2[-(\eta_1 + \bar{x})(\eta_3 + \bar{z}) + c(\eta_2 + \bar{y}) - k_2\eta_2] + \frac{c}{\mu a}(g - g^*)\eta_1^2 \\ &+ \frac{1}{\rho}(k - k^*)\eta_3^2 \\ &= -a(\eta_2 - \eta_1)^2 - \frac{a}{c}\eta_1^2(g^* - c) - 2b\eta_1\eta_3 - k^*\eta_3^2. \end{aligned}$$

It is clear that for positive parameters a, b, c, μ, ρ , if we choose $g = g^* > c, k = k^* > 0$, then \dot{V} is negative semidefinite. Since V is positive definite and \dot{V} is negative semidefinite, $\eta_1, \eta_2, \eta_3, g, k \in L_\infty$. From $\dot{V}(t) \leq 0$, we can easily show that the square of η_1, η_2, η_3 are integrable with respect to t , namely, $\eta_1, \eta_2, \eta_3 \in L_2$. From (2.2), for any initial conditions, we have $\dot{\eta}_1, \dot{\eta}_2, \dot{\eta}_3 \in L_\infty$. By the well-known Barbalat's Lemma, we conclude that $\eta_1, \eta_2, \eta_3 \rightarrow (0, 0, 0)$ as $t \rightarrow +\infty$. Therefore, in the closed-loop system, the equilibrium point $E = (\bar{x}, \bar{y}, \bar{z})$ of the system (2.2) is asymptotically stable.

3. Numerical example

Numerical experiments are carried out to investigate controlled systems by using Fourth-order Runge-Kutta method with time step 0.01. The parameters a, b, c, μ, ρ are chosen as $a=15, b=10, c=0.5, \mu=1, \rho=0.5$ to ensure the existence of chaos in the absence of control. The initial states are taken as $x=0.5, y=0, z=0$. The initial values of parameters μ, ρ are 0 in this simulation. Fig. 1 shows time response for the states x, y, z of the controlled system (1.1) after applying adaptive Control with two controllers.

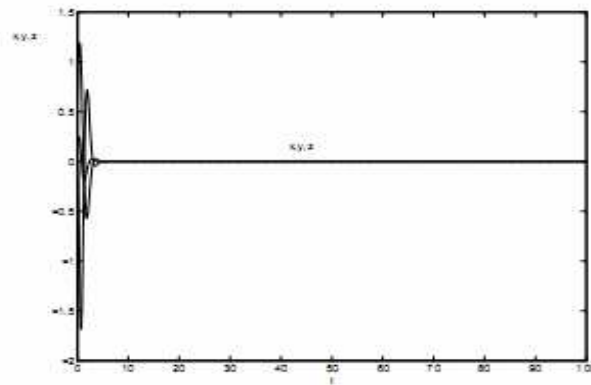


Figure 1: The time response of the states x, y, z of the controlled system (2.2), where $\bar{x}=0, \bar{y}=0, \bar{z}=0$.

4 Conclusion

In this paper, we give sufficient conditions for stability of equilibrium points of adaptive Control with two controllers which control the chaotic behavior of Lu's system to its equilibrium points. Numerical Simulations are also given to verify results we obtained.

5 Open Problems

Chaos in control systems and controlling chaos in dynamical systems have both attracted increasing attention in recent years. A chaotic system has complex dynamical behaviors that possess some special features, such as being extremely sensitive to tiny variations of initial conditions, having bounded trajectories in the phase space. Controlling chaos has focused on the nonlinear systems such as a Lu's system.

1. The problem of this paper gives sufficient conditions of parameters that make equilibrium point of Adaptive Control with two controllers of the Lu's system to be asymptotically stable.
2. The problem of the chaos of system is controlled to one of three equilibrium point of system. Feedback control method is applied to achieve this goal.

ACKNOWLEDGEMENTS

This work was supported by the Thai Research Fund Grant, the Higher Education Commission and Faculty of Science, Maejo University, Thailand.

References

- [1] K. Abdelwahab and R.B. Guenther, *An Introduction to Numerical Methods a MATLAB Approach*, Chapman and Hall/CRC, New York, 2002.
- [2] K.V.L.N. Acharyulu and N. Ch. Pattabhi Ramacharyulu, On the stability of an ammensal- enemy harvested species pair with limited resources, *Int. J. Open Problems Compt. Math.*, 3(2) (2010).
- [3] S. Barnett and R.G. Cameron, *Introduction to Mathematical Control Theory*, Oxford, Clarendon Press, 1985.
- [4] H.M. El-Hawary and K.A. El-Shami, Spline Collocation Methods for Solving Second Order Neutral Delay Differential Equations, *Int. J. Open Problems Compt. Math.*, 2(4) (2009).
- [5] J. Lu and G. Chen, A new chaotic attractor coined, *Int. J. Bifurc. Chaos*, 12 (2002) 659-661.
- [6] L.V. Hien, Q.P. Ha and VN Phat, Stability and stabilization of switched linear dynamic systems with time delay and uncertainties, *Appl. Math. Comput.*, 210(2009), 223-231.